


(A) FLAT AREA PLANTING

**NOTES**


1. SEE STD PLN 602 FOR TREE PLANTING DETAIL.
2. SEE STD PLN 603 FOR SHRUB PLANTING DETAIL.
3. FOLIAGE PROTECTOR TO BE USED IN AREAS TO PROTECT FROM DEER. WORKS FOR PLUGS AND LARGER PLANTINGS. PLANT SHALL BE PLACED IN CENTER OF PROTECTOR.
4. WIRE MESH CYLINDER SHALL BE FABRICATED FROM 1", HEXAGONAL PATTERN, 20-GAUGE MESH WIRE.
5. WIRE EDGE AT TOP OF CYLINDER SHALL BE THE MANUFACTURED FINISHED EDGE. OTHER WIRE EDGES THAT ARE CUT MUST BE FREE OF SHARP POINTS.
6. SUPPORT STAKES SHALL BE 2" NOMINAL DIA OR 2" X 2" NOMINAL SIZE GREEN STEEL METAL T-POST STAKES A MINIMUM OF 5' LONG.
7. JUTE MESH COVER SHALL BE UNBLEACHED, UNDYED, DEGRADABLE, OPEN WEAVE TEXTILE (OWT), RATED FOR 12 MONTHS, 14-20 STRANDS PER FOOT (MIN IN EA DIRECTION), MIN WEIGHT 14.4-19.2 OZ/SQ YD.
8. TWINE SHALL BE 1/8" DIA MANILA HEMP TWINE.
9. FASTENERS SHALL BE 1/2" LEG X 3/8" CROWN GALVANIZED STEEL STAPLES, T50 OR EQUAL.
10. MONITOR GROWTH AND PLANT ESTABLISHMENT AS REQUIRED. READJUST FOLIAGE PROTECTOR AS PLANT GROWTH EXCEEDS SPACE. REMOVE PROTECTOR AND STAKES AFTER ESTABLISHMENT PERIOD IS COMPLETE OR OTHERWISE DEEMED APPROPRIATE FROM THE MAINTENANCE/MONITORING TEAM.

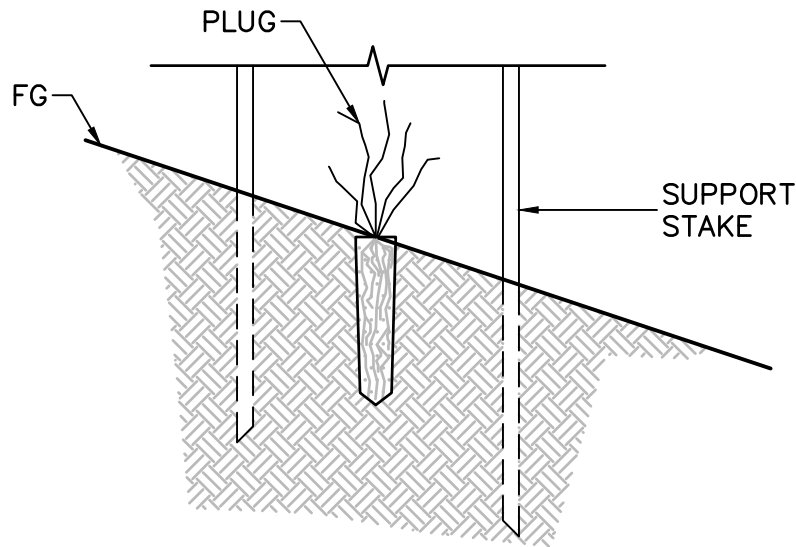

SLOPE W/O PLANTING TERRACE

NOTES

1. PRE-CUT WIRE MESH AT 45° ANGLE TO ACCOMMODATE SLOPE.

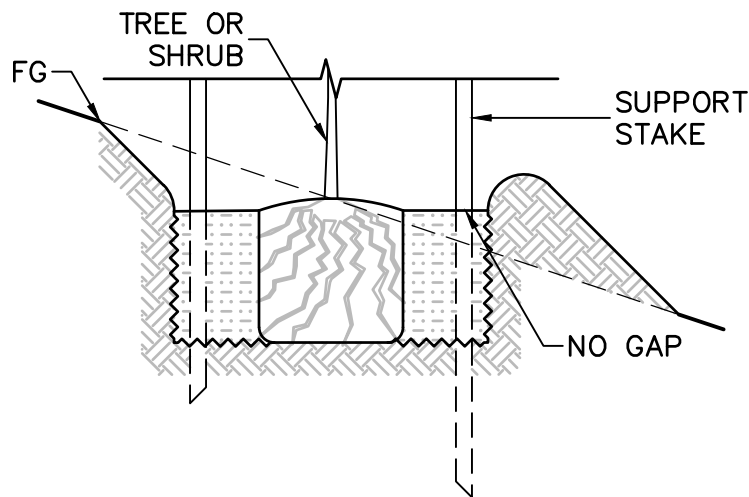

SLOPE W/ PLANTING TERRACE

(B) SLOPED AREA PLANTING

NOTES

1. PROVIDE FLATTENED PLANTING TERRACE AREA MINIMUM 2'-0" WIDE.
2. PRE-CUT WIRE MESH AT 45° ANGLE TO ACCOMMODATE SLOPE.



**FOLIAGE PROTECTOR**

REVIEWED BY THE PARK STANDARDS COMMITTEE, AND APPROVED BY THE CHIEF OF DESIGN & CONSTRUCTION

03/04/2025

STD PLAN

**604**

SHEET 2 OF 2  
NOT TO SCALE